


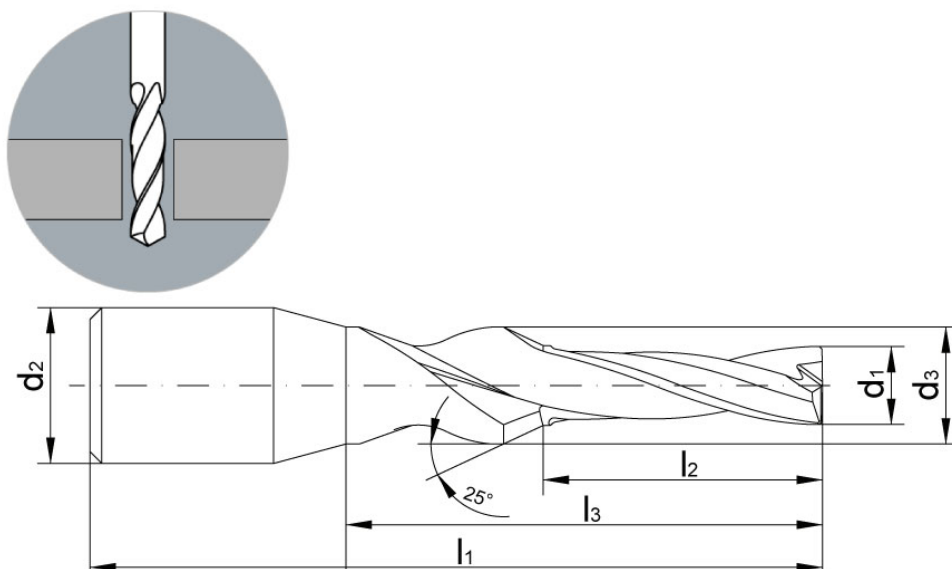

TTD1800190E

Type: 180° Pilot Drill with reinforced shank

d1	d2	d3	l1	l2	l3
1,90	4,00	3,40	40	6,70	11,90

Coolant holes	Cut	Point angle	Spiral angle	Chamfer	Cutting edges Z
No	Right	180°	Variabile	25°	2

Coated	Coating type	Material	Material type	Norm
Yes	ALCRONOS	MD	SMG 10	TUSA

Machinable Materials				
Cod.	Material type	Machinability	Cutting speed Vc	Advancement per revolution fn
		Recommended Part. recommended Not recommended	(m/min)	(mm/rev)
P01	Unalloyed steels up to 800 N/mm2		65 : 80	0.015-0.02
P02	Low alloy steels from 800 N/mm2 to 1100 N/mm2		50 : 60	0.013-0.018
P03	Highly alloyed steels from 1100 N/mm2 to 1400 N/mm2		40 : 50	0.013-0.018
M01	Ferritic stainless steels		35 : 40	0.007-0.008
M02	Martensitic stainless steels		40 : 50	0.014-0.016
M03	Martensitic stainless steels - PH		40 : 50	0.014-0.016
M04	Austenitic stainless steels		25 : 30	0.007-0.008
K01	Gray/lamellar cast iron		70 : 80	0.015-0.02
K02	Nodular/nodular cast iron		60 : 70	0.015-0.02
N01	Drawn aluminum alloys		115 : 125	0.020-0.025
N02	Die-cast aluminum alloys		115 : 125	0.020-0.025
N03	Copper		65 : 80	0.013-0.018
N04	Brass - Bronze		90 : 100	0.020-0.025
N05	Lead-free brass		80 : 90	0.013-0.018
S01	Super alloys (Inconel - Hastelloy - Nimonic)		15 : 20	0.006-0.007
S02	Pure titanium (Grade 2 - Grade 4)		20 : 30	0.014-0.016
S03	Titanium alloys (Grade 5)		20 : 30	0.014-0.016
S04	Cobalt Chrome Alloys		15 : 20	0.007-0.008
H01	Hardened steels up to 55 HRC		15 : 20	0.006-0.007
H02	Hardened steels from 55 HRC		-	-