
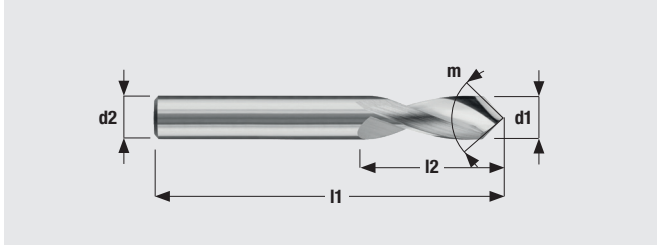


MTB40

Punta in metallo duro da centro 120°
 Carbide Center drill 120°
 Hartmetall-Bohrer zentrumschneidend 120°
 Foret carbure à centrer 120°

Z
2

TUSA
NORM





Art. Tusa Precision	d1 h6	d2 h6	l1 0/+1	l2 0/+1	m +/-2°
MTB4000300	3,00	3	45	12,00	120°
MTB4000400	4,00	4	50	15,00	120°
MTB4000500	5,00	5	50	18,00	120°
MTB4000600	6,00	6	50	21,00	120°
MTB4000800	8,00	8	60	25,00	120°
MTB4001000	10,00	10	70	27,00	120°
MTB4001200	12,00	12	70	27,00	120°
MTB4001400	14,00	14	75	30,00	120°
MTB4001600	16,00	16	75	30,00	120°

MTB41

Punta in metallo duro da centro 90°
 Carbide Center drill 90°
 Hartmetall-Bohrer zentrumschneidend 90°
 Foret carbure à centrer 90°

Z
2

TUSA
NORM

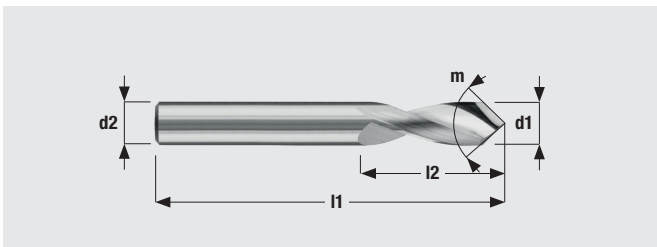

Art. Tusa Precision	d1 h6	d2 h6	l1 0/+1	l2 0/+1	m +/-2°
MTB4100300	3,00	3	45	12,00	90°
MTB4100400	4,00	4	50	15,00	90°
MTB4100500	5,00	5	50	18,00	90°
MTB4100600	6,00	6	50	21,00	90°
MTB4100800	8,00	8	60	25,00	90°
MTB4101000	10,00	10	70	27,00	90°
MTB4101200	12,00	12	70	27,00	90°
MTB4101400	14,00	14	75	30,00	90°
MTB4101600	16,00	16	75	30,00	90°